


## OPTi-62-Hand-Held-OTDR

### Optical Fiber Instrument

- Built-in VFL, OPM, OLS
- 3.2 inch color LCD
- Automatic one-button test
- Handheld design, lightweight and portable
- Automatic detection and protection of input light
- Humanized OTDR software provides detailed test reports

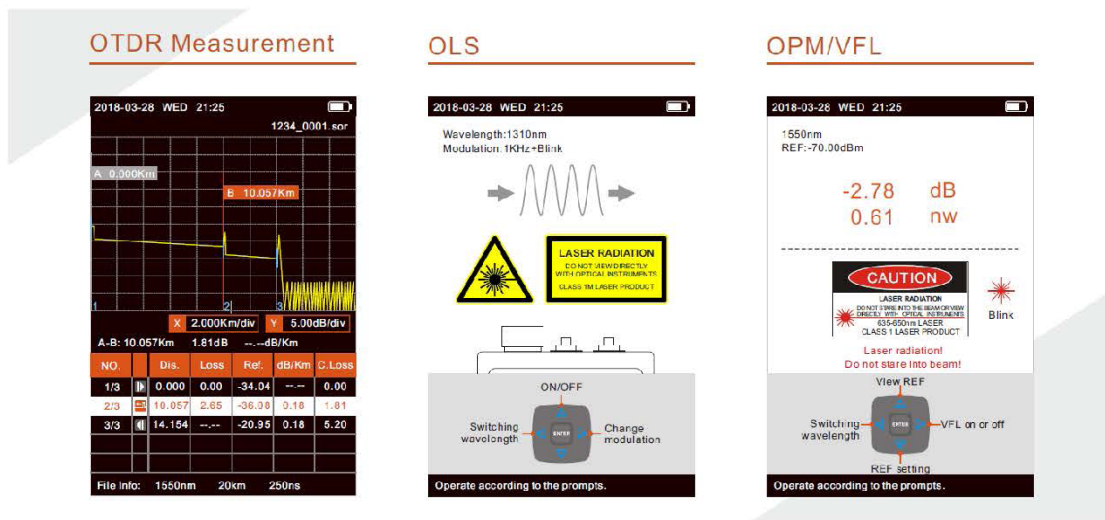

Wavelength	1310/1550nm
Dynamic range	22/20dB
Distance Setting	Max. 80km
OTDR Connector	FC/UPC or customized
Pulse width	5ns~10us
Measuring time	5~180s
Attenuation dead zone	8m
Event dead zone	3m
LCD	3.2 inch LCD
OPM function	+26~-50dBm, 850/1300/1310/1490/1550/1625nm, 2.5mm UPP
VFL function	1mW
Storage	Internal memory or TF card (optional)
Communication interface	Micro USB 1

Battery	3.7V 2400mAh lithium polymer battery
Operating temperature	0~ 50°C
Storage temperature	-20~+70°C
Relative humidity	<90%
Weight	333g
Size	168mm 95mm 38mm

## ACCESSORIES



Carrying bag



Calibration certificate



Manual



CD



AC/DC adapter



Packing box

## ORDERING INFORMATION

OPTI-62-FCU, OTDR FC/UPC connector

OPTI-62-SCU, OTDR SC/UPC connector

OPTI-62-SCA, OTDR SC/APC connector